



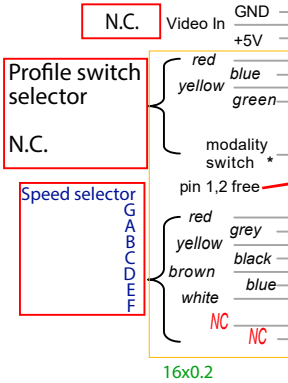


MAIN BOARD LOGIC FEEDING INPUT
 12vac - min17vcc

Sprocket wheel
 4096ppr Encoder
 gr/ye/br/bl -> A
 Red -> B
 Green -> C
 Pink -> D





*Modality Switch
 Open: SPD (speed) mode
 GND bridged: POS mode

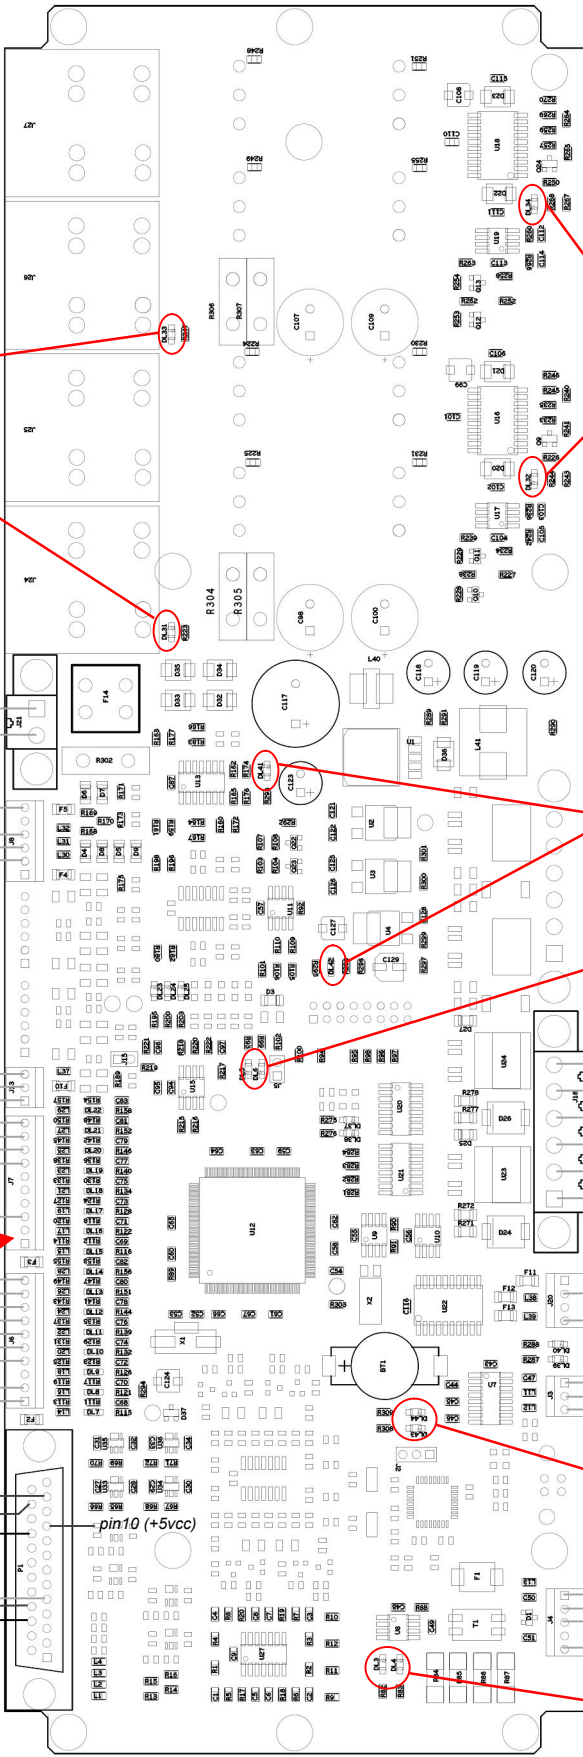

Overload LED monitor

Digital section feeding LED monitor

STATE MONITOR LED
 Green(blink): OK
 Yellow: Error



White ~~Strobo~~
 GND ~~TTL pulses~~

GND TXD RXD ~~RS232~~

Led RS232

+18Vcc Etherline
 CAN H Red
 CAN L Green
 GND White
 Black

Led can bus